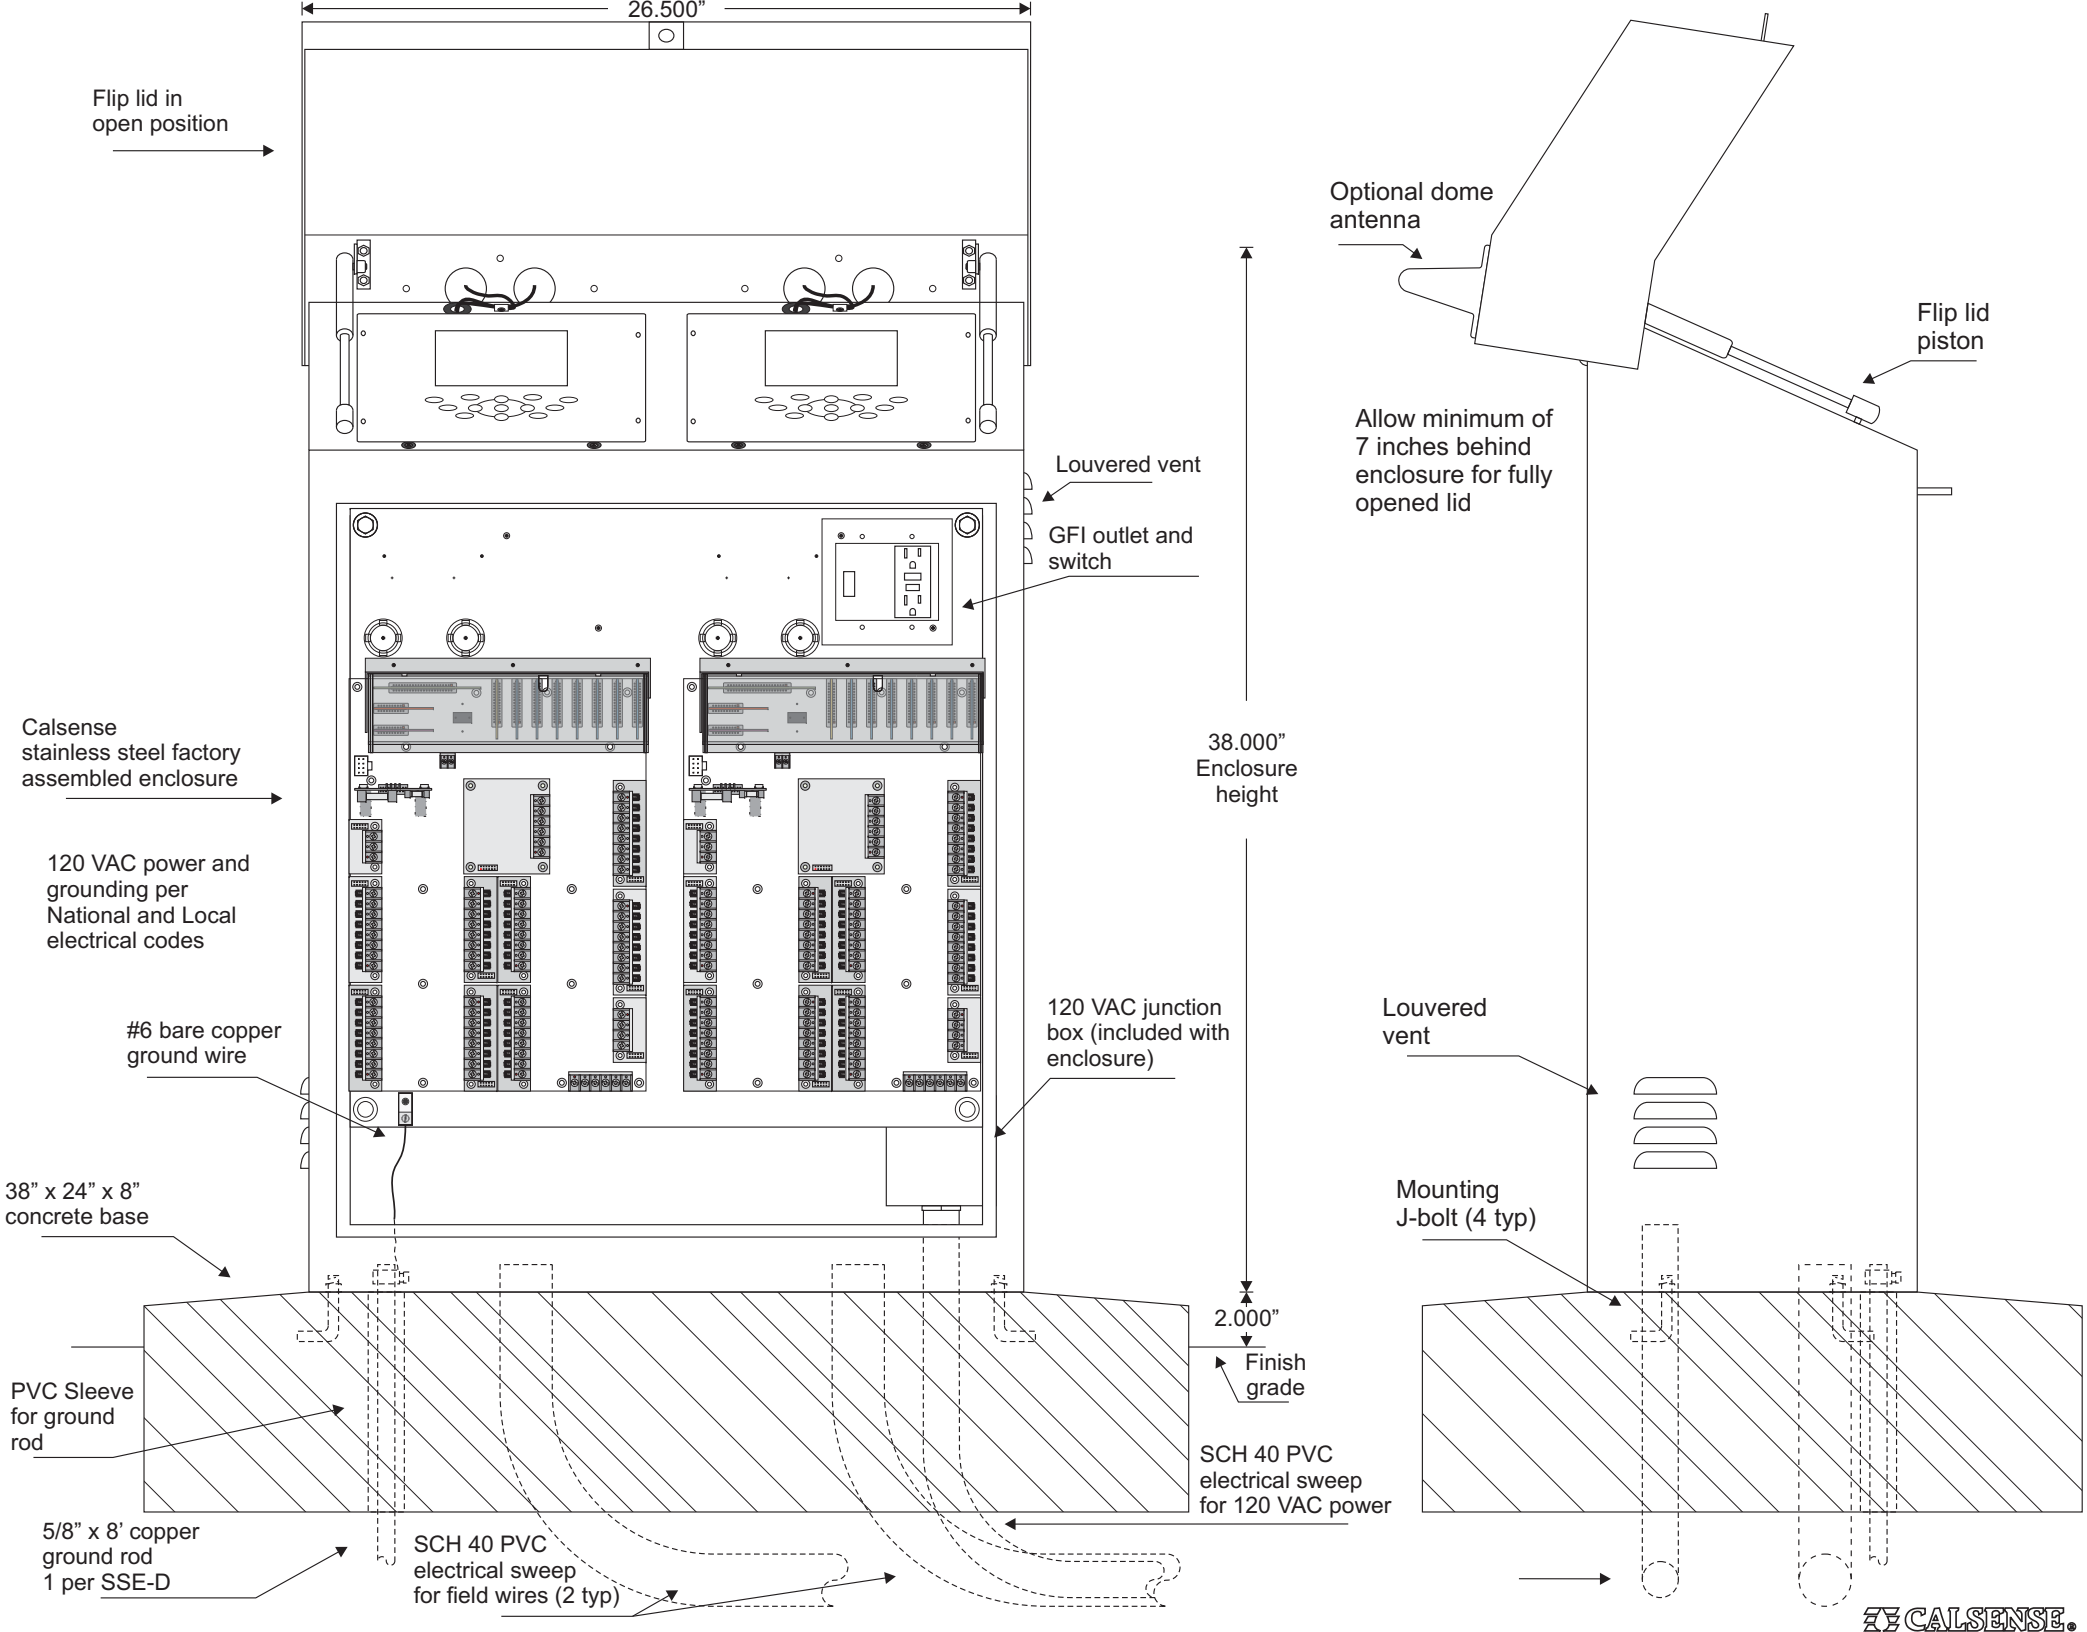
26.500”
Flip lid in open position
Optional dome antenna
Flip lid piston
Allow minimum of 7 inches behind enclosure for fully opened lid
Louvered vent
GFI outlet and switch
38.000” Enclosure height
Calsense stainless steel factory assembled enclosure
120 VAC power and grounding per National and Local electrical codes
#6 bare copper ground wire
120 VAC junction box (included with enclosure)
Louvered vent
38” x 24” x 8” concrete base
Mounting J-bolt (4 typ)
2.000”
Finish grade
PVC Sleeve for ground rod
SCH 40 PVC electrical sweep for 120 VAC power
5/8” x 8’ copper ground rod 1 per SSE-D
SCH 40 PVC electrical sweep for field wires (2 typ)
CALSENSE