

# ***RAIN BUCKET***



# ***SPECIFICATION***



**RAIN BUCKET**

**TECHNICAL SPECIFICATIONS**

**Performance:**

Resolution: 0.01 inches  
 Accuracy: 1.0% at 2"/hr. or less  
 Average Switch Closure Time: 135ms  
 Maximum Bounce Setting Time: 0.75ms  
 Maximum Bounce Closure Time: 0.25ms  
 Maximum Switch Rating: 30 VDC @ 2 A  
 115 VAC @ 1 A

**Model number:**


RB-1 Calsense Tipping Rain Bucket

**Environmental:**


Humidity Limits: 0 to 100%  
 Temperature Limits: 32 deg. F to 125 deg F  
 Calibration: 16 fluid oz.  
 (100 bucket tips)

**Physical:**

Height: 9.5 " (less mounting legs)  
 Diameter: 6 .25" (less mounting brackets)  
 Weight: 2.5 pounds  
 Receiving orifice: Gold anodized aluminum  
 Body: Aluminum with a white baked enamel surface.  
 Mountings: Flat surface or pole



Platform Mounted

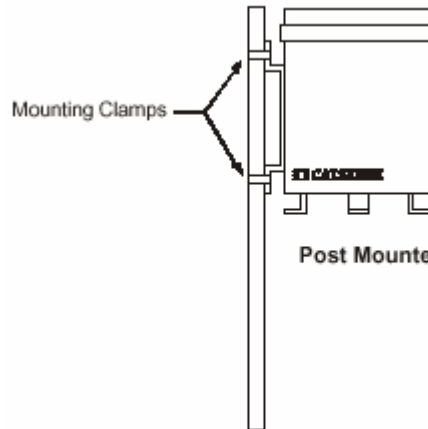

Post Mounted



2075 Corte del Nogal, Suite P, Carlsbad CA 92011  
 1-(800)-572-8608 FAX: 1-(760)-438-2619  
 www.calsense.com

Stock Number: PG1-RB-B

Rev. 03/06